

NVR-100MH-D/W(C) Series Wi-Fi NVR

Key Feature

- H.265+/H.265/H.264+/H.264 video compression
- Up to 50 Mbps incoming bandwidth, and 40 Mbps outgoing bandwidth
- Up to 4/8-ch network camera inputs
- Up to 4-ch 4 MP decoding capability
- HDMI and VGA simultaneous output
- Stable Wi-Fi connection



Compression and Recording

- H.265+ compression effectively reduces the storage space by up to 75%
- Full channel recording at up to 6 MP resolution

Storage and Playback

- 4-ch@4 MP (12 fps), 4-ch@1080p (25 fps) playback resolution
- 1 SATA interface (up to 6 TB capacity per HDD)

Network & Ethernet Access


- Dual external antenna design offers more powerful and stable signal
- 1 self-adaptive 10/100 Mbps Ethernet interface
- HiLookVision for easy network management

Specification

Model	NVR-104MH-D/W(C)	NVR-108MH-D/W(C)
Video and Audio		
IP video input	4-ch	8-ch
	Up to 6 MP resolution	
Incoming bandwidth	50 Mbps	
Outgoing bandwidth	40 Mbps	
HDMI output	1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
VGA output	1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output	
Audio output	1-ch, RCA (linear, 1 KΩ)	
Decoding		
Decoding format	H.265+/H.265/ H.264+/H.264	
Recording resolution	6 MP/5 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF	
Playback mode	Normal/Smart, Event, Tag, Eternal File	
Synchronous playback	4-ch	8-ch
Live view window division	1/4	1/4/6/8/9
Aux port window division	1/4	1/4/6/8/9
Capability	1-ch@6 MP (25 fps), 1-ch@5 MP (25 fps), 4-ch@4 MP (12 fps), 4-ch@1080p (25 fps)	
Stream type	Video, Video & Audio	
Network		
Remote connection	16	
Network protocol	TCP/IP, DHCP, HiLookVision, DNS, DDNS, NTP, SADP, SMTP, UPnP™	
Network interface	1, RJ-45 10/100 Mbps self-adaptive Ethernet interface	
Wireless Parameter		
Frequency band	2.4 GHz	
Antenna structure	2 × 2MIMO	
Transmission speed	300 Mbps	
Transmission standard	IEEE 802.11b/g/n	
Auxiliary Interface		
SATA	1 SATA interface	
Capacity	Up to 6 TB capacity for each disk	
Alarm in/out	N/A	
USB interface	Rear panel: 2 × USB 2.0	
General		
Power supply	12 VDC, 1.6 A	
Consumption (without HDD)	≤ 10 W	
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)	
Working humidity	10% to 90%	
Chassis	Mini 1U	
Material	Metal box	
Dimension (W × D × H)	265 × 225 × 48 mm (10.4" × 8.9" × 1.9")	


Weight (without HDD)	≤ 1.6 kg (3.5 lb)
Certification	
FCC	Part 15 Subpart B, ANSI C63.4-2014
CE	EN50130-4, EN 61000-3-2,EN 61000-3-3

Dimension

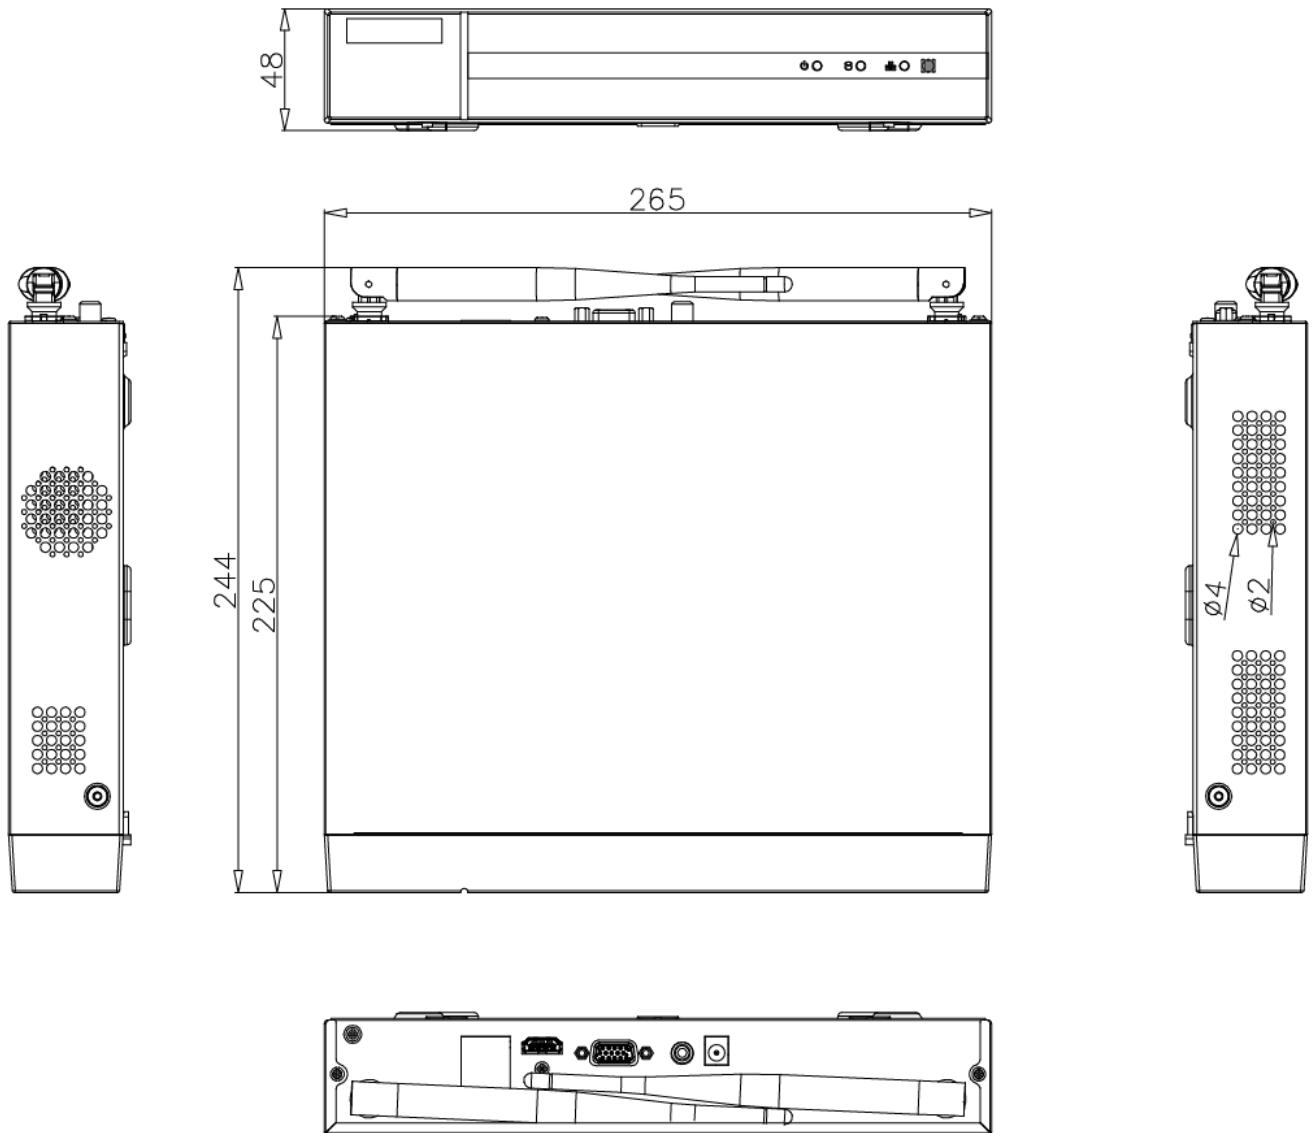

Unit: mm

Physical Interface

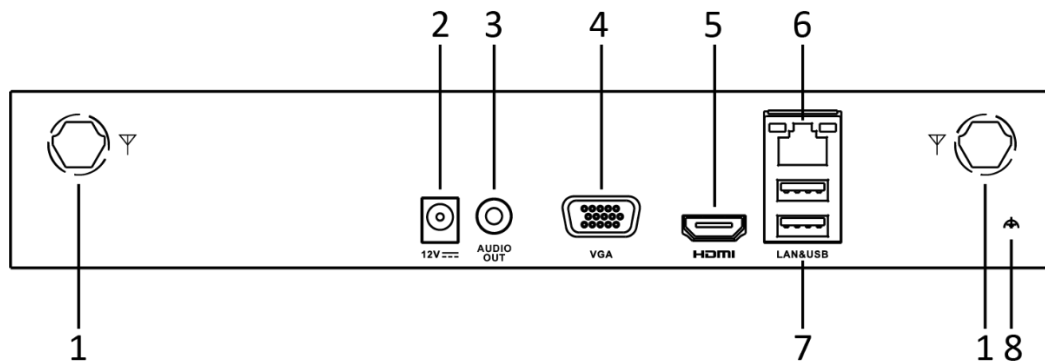

No.	Description	No.	Description
1	Dual Wi-Fi antenna	5	HDMI interface
2	Power supply	6	LAN network interface
3	AUDIO OUT	7	USB interface
4	VGA interface	8	Ground

Available Model

NVR-104MH-D/W(C), NVR-108MH-D/W(C)