

## DS-2CE70DF0T-PF 2 MP ColorVu Indoor Fixed Turret Camera



- High quality imaging with 2 MP, 1920 × 1080 resolution
- 24/7 color imaging with F1.0 aperture
- 3D DNR technology delivers clean and sharp images
- 2.8 mm, 3.6 mm, 6 mm fixed focal lens
- Up to 20 m white light distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)




## ▪ Specification

| Camera                   |  |
|--------------------------|--|
| Image Sensor             | 2 MP CMOS  |
| Signal System            | PAL/NTSC   |
| Resolution               | 1920 (H) × 1080 (V)  |
| Frame Rate               | TVI: 1080p@25fps/30fps<br>CVI: 1080p@25fps/30fps<br>AHD: 1080p@25fps/30fps<br>CVBS: PAL/NTSC   |
| Min. Illumination        | 0.001 Lux @ (F1.0, AGC ON), 0 Lux with white light   |
| Shutter Time             | PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s  |
| Lens                     | 2.8 mm, 3.6 mm, 6 mm Fixed Lens  |
| Field of View            | 2.8 mm, horizontal FOV: 98°, vertical FOV: 51°, diagonal FOV: 115°<br>3.6 mm, horizontal FOV: 76°, vertical FOV: 41°, diagonal FOV: 90°<br>6 mm, horizontal FOV: 50°, vertical FOV: 27°, diagonal FOV: 58° |
| Lens Mount               | M12  |
| Light Alarm              | Solid Light Alarm (White Light)  |
| WDR (Wide Dynamic Range) | Digital WDR  |
| Angle Adjustment         | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°   |
| Menu                     |  |
| White Light              | Auto/Off   |
| Image Mode               | STD/HIGH-SAT/HIGHLIGHT   |
| AGC                      | Yes  |
| Day/Night Mode           | Color  |
| White Balance            | Auto/Manual  |
| AE (Auto Exposure) Mode  | DWDR, BLC, HLC, Global   |
| Noise Reduction          | 3D DNR/2D DNR  |
| Language                 | English  |
| Function                 | Brightness, Mirror, Sharpness, Anti-Banding, Smart Light   |
| Interface                |  |
| Video Output             | Switchable TVI/AHD/CVI/CVBS  |
| General                  |  |
| Operating Conditions     | -40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensing)   |
| Power Supply             | 12 VDC ± 25%<br><i>*You are recommended to use one power adapter to supply the power for one camera.</i>   |
| Consumption              | Max. 2.4 W   |
| Material                 | Plastic  |
| White Light Range        | Up to 20 m   |
| Communication            | HIKVISION-C  |
| Dimension                | Φ 85.02 mm × 81.25 mm (Φ 3.35" × 3.2")   |
| Weight                   | Approx. 161 g (0.36 lb)  |





## ▪ Available Model

DS-2CE70DF0T-PF

## ▪ Dimension

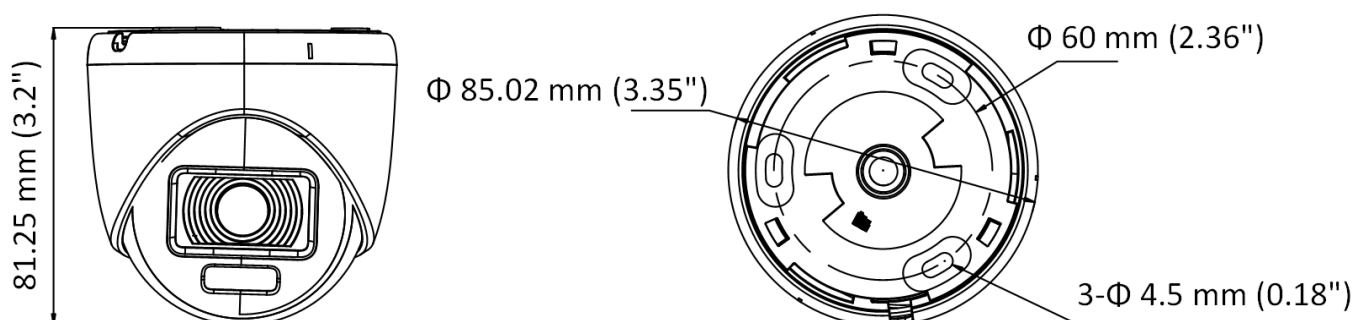

## ▪ Accessory

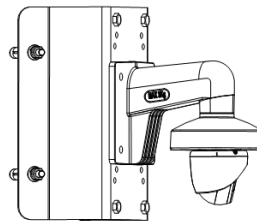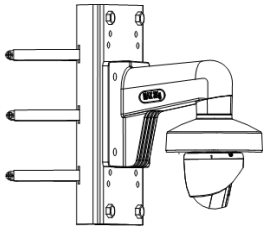

DS-1275ZJ-SUS

DS-1272ZJ-110-TRS

DS-1276ZJ-SUS

DS-1280ZJ-XS

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 [10] 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33[0]1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-[0]31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com